



# SRP-Q200

2 inch POS Printer



## Ultra-Compact and Flexible

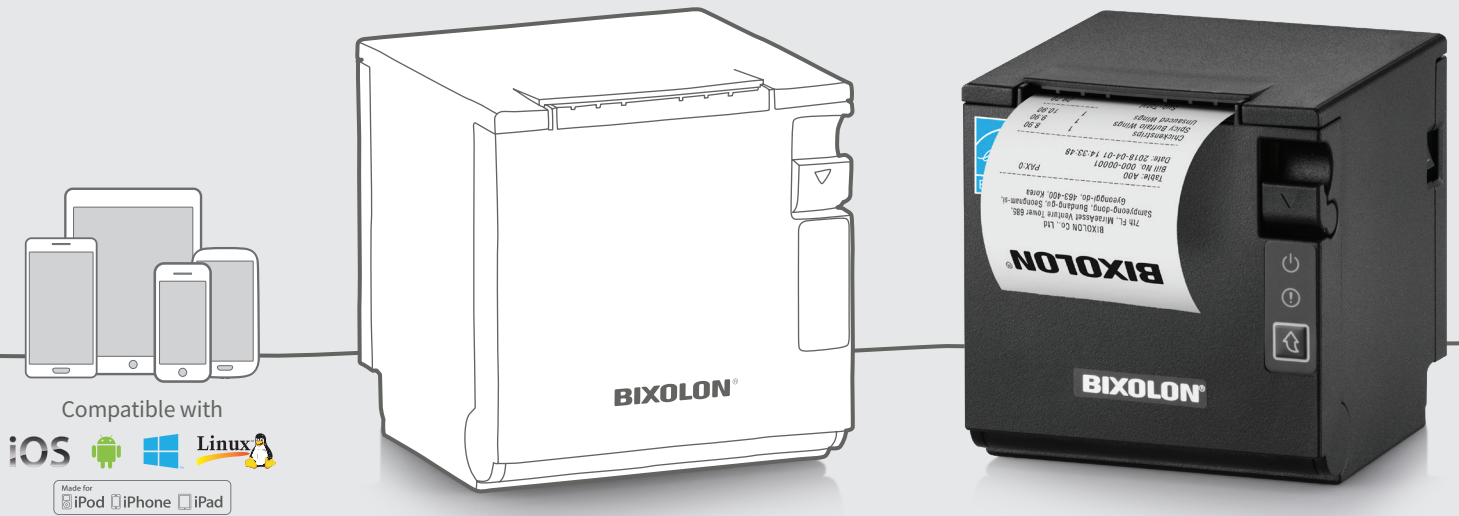

Compatible with  
**iOS** **Linux**   
Made for  
iPod iPhone iPad



### Ideal POS solution for limited-spaces

- Compatible with all major operating systems including Android™, iOS™ and Windows®
- Dual-band WLAN (5GHz and 2.4 GHz)
- Dual-mode Bluetooth V4.2 Classic (MFi AP2 certified) and LE



### Superb Speed and Quality

- Fast printing speeds up to 250 mm/sec
- Producing quality receipts at 203 dpi print resolution
- VMSM, NV image tools are supported via the BIXOLON Utility through various connectivity options (Bluetooth, WLAN, USB)



### Small Footprint and Sleek Design

- Compact cube design fits easily into limited work spaces (102 x 104 x 107 mm)
- Ability to print vertically and horizontally depending on requirements

# SRP-Q200

## 2 inch POS Printer

### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

Up to 250 mm/sec

**Print Resolution**

203 dpi

**Print Width**

Up to 54mm

**Sensor**

Paper End, Cover Open

### Media Characteristics

**Media Type**

Receipt

**Media Width**

58.0 mm

**Media Roll Diameter**

Up to 60 mm

**Media Thickness**

0.05 ~ 0.08mm

**Supply Method**

Easy Paper Loading

### Physical Characteristics

**Dimensions (W x D x H)**

103 x 104 x 109 mm  
(4.03 x 4.10 x 4.24 inch)

**Weight**

0.61 kg (1.34 lbs.)

**Power**

EnergyStar Certified,  
External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (Via y-type adaptor)

### Performance Characteristics

**NV Image Memory**

768 Kbytes (mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

Standard: ① USB V2.0 FS + Serial  
② USB V2.0 FS + Ethernet

Optional: ① USB V2.0 FS + Ethernet + WLAN<sup>1</sup>  
② USB V2.0 FS + Ethernet + Bluetooth<sup>2</sup>

WLAN<sup>1</sup>: 802.11a/b/g/n (2.4G + 5G)

Bluetooth<sup>2</sup>: V4.2 Classic / LE, MFi certified

### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)  
Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH  
Storage: 10 ~ 90% RH

### Reliability

**Thermal Print Head (TPH)**

100 km

**Auto Cutter**

1.0 Million Cuts

**\*\*\* Specified Paper**

- TF50KS-E (Paper Thickness: 65µm)  
: Nippon Paper Industries Co., Ltd.
- PD 160R (Paper Thickness: 75µm)  
: New Oji Paper Mfg. Co., Ltd.
- P350 (Paper Thickness: 62µm)  
: Kansaki Specialty Paper, Inc. (USA)
- Hansol Thermo 65 (Paper Thickness: 65µm)  
: Hansol Paper Co., Ltd (Korea)

### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver, OPOS / JPOS Driver, Linux / Mac  
CUPS Driver, Virtual COM USB / Ethernet Driver,  
Utility Program

**SDK / Plugin**

Android / iOS / Windows SDK, Linux SDK,  
Xamarin SDK, Chrome SDK, Cordova Plugin

**Application**

mPrint App (iOS)

### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24  
KOR, CHN, JPN: 24 x 24

**Characters Per Line**

Font A: 36, Font B, C: 48  
KOR, CHN, JPN: 18

**Character Sets**

Alphanumeric: 95  
Extended Graphics: 128 x 35 page  
International: 32

**Graphics**

Supporting user-defined fonts, graphics,  
formats and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128, EAN-8,  
EAN-13, ITF, UPC-A, UPC-E  
2D: Data Matrix, PDF417, QR Code

### Accessories

**Optional**

External buzzer, B-Melodist, USB A-B Cable 1.8m,  
Serial Cable (9pin-9pin)

