

SRP-S200

2-inch Linerless Printer



Coffee Shop



Quick Service Restaurant




Food Delivery



Retail

Compact and Economical

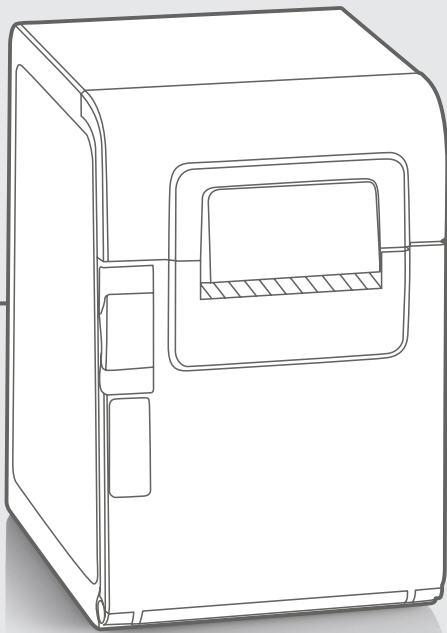


150
mm/sec

203
dpi




First in its Class

- Built for 2-inch Restick media
- 2 media widths supported: 40 / 58 mm
- Fast print speed of up to 150 mm/sec at 203dpi
- USB V2.0 FS + Ethernet + Serial interface
- BIXOLON Profile Manager - XPM™, XCM™ (Windows, Android)

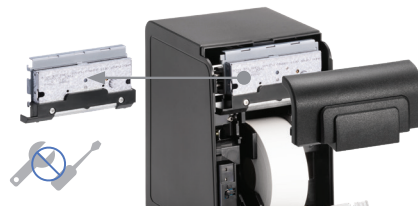

Small in Size, Easy to Use

- Compact 2-inch printing solution for limited workspaces
- Easy toolless replacement of TPH, Platen Roller and Auto Cutter
- IP23 rating and built-in SMPS delivers water resistant operation
- Optional alarm notifications to support busy kitchen environments

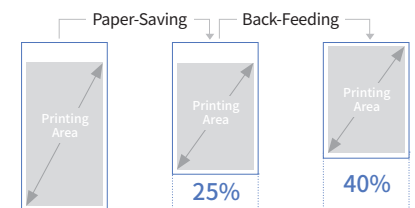

Productivity Driving Technology

- Paper saving mode and back-feed function (offering up to 40% media saved)
- Special paper path design and an automatic guillotine cutting system
- Taken Sensor™: Label will not continue to print until current label is removed to prevent jamming

BIXOLON
a Better Solution for your Business™

SRP-S200

2-inch Linerless Printer

Specifications

Print Characteristics

Print Method

Direct Thermal (Front Exit)

Print Speed

Up to 150 mm/sec

Print Resolution

203 dpi

Print Width

Up to 54 / 32 mm

Sensor

Paper End, Cover Open

Media Characteristics

Media Type

Restick

Media Width

58 mm

Optional 40 mm

Media Roll Diameter

Up to 103 mm

Media Thickness

0.06 ~ 0.09 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x L x H)

128 x 156 x 196 mm

(5.03 x 6.14 x 7.71 inch)

Weight

1.80kg (3.96 lbs.)

Electrical

Energy Star Certified,
External Power Supply Housed Internally
(Adaptor 24V/2.5A)

Performance Characteristics

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS + Ethernet + Serial

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Sealing

IP23

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver

OPOS / JPOS Driver

Linux / Mac CUPS Driver

Virtual COM USB / Ethernet Driver

Utility Program

SDK / Plugin

Android / iOS / Windows SDK

Linux SDK

Xamarin SDK

Chrome SDK

Web Print SDK

Cordova Plugin

Application

mPrint App (Android, iOS): B-gate Not Supported

MDM (Optional)

BIXOLON Profile Manager

- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

Font A: 36 Font B, C: 48 KOR, CHN, JPN: 18

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 35 page

International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Coda Bar, Code 39, Code 93, Code 128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR code

Accessories

Standard

40mm Partition

Optional

External buzzer, USB A-B Cable 1.8m,
USB to Serial cable, Serial Cable (9-9)

Supplies

B-linerless