




VKP60

60mm Ultra-Compact Receipt/Ticket Kiosk Printer

VKP60 is the kiosk printer for **receipts and tickets**, capable of adapting to a wide range of settings thanks to its **multiple configurations**. Compact, versatile, and packed with features such as **anti-jam**, **total** and **partial cut**, this device fits any type of kiosk with its roll holder adjustable in two positions. The product boasts self-installing Windows®, Linux, OPOS, Java POS, and Status Monitor SDK **drivers** and it supports PrinterSet, CPT, Windows® API, Driver Manager, Android™ API, and iOS API **software tools**. VKP60 is available in two different configurations: compact and paper mouth.

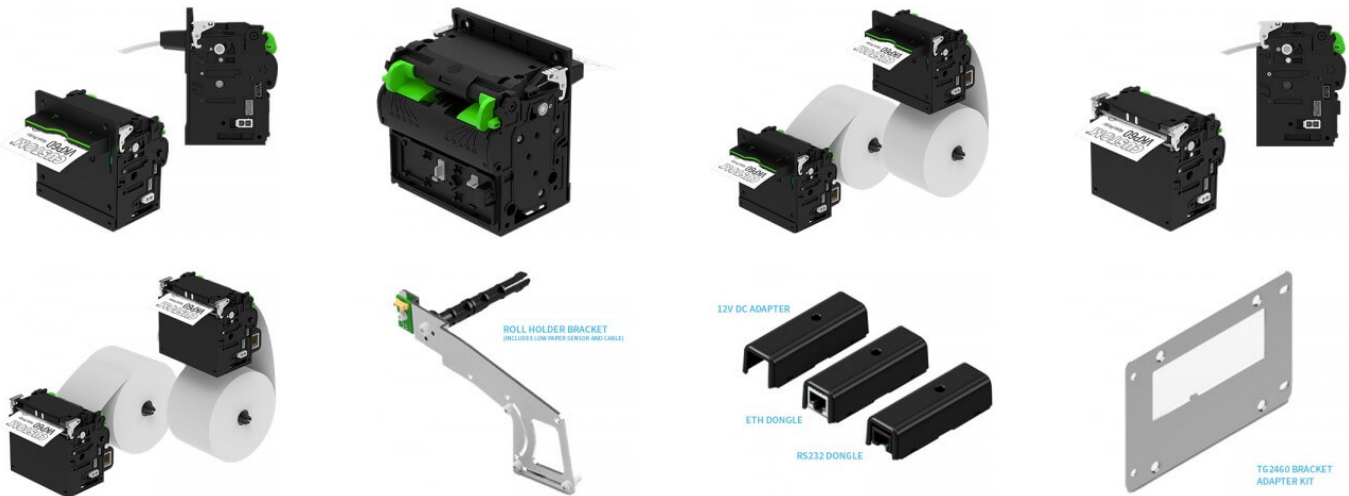

CHARACTERISTICS

1. Performance and compactness

Ultra-compact solution capable of total and partial cut

2. High versatility

The wide range of accessories make it a suitable for every application

3. Easy software integration

CUSTOM configuration utilities and SDK for all OS

4. Interface friendly

USB is default, serial and ethernet are available as optional

5. Active anti-jam

Reduces the need for technical service and allows a reliable receipt delivery

MARKETS

- Self-service kiosks
 - Bank branches
 - Gaming machines
 - Parking systems
 - Queue management systems
 - Vending machines
 - Gas stations
 - Payment terminals
-

ACCESSORIES

- Roll holder bracket VKP60 with NPE
- VKP60 adapter to 12Vdc
- VKP60 compatible TG2460 fixing kit
- Dongle ETH VKP60
- Dongle RS232 VKP60

CERTIFICATIONS

CUSTOM


Paper Saving Mode

The **VKP60** model, unlike the previous Custom models of equal commercial positioning, thanks to the Paper Saving Mode, is capable of reducing paper usage while maintaining the same amount of data present on the ticket/receipt.

TECHNICAL SHEET

	VKP60 - Compact	VKP60 - Paper Mouth
Resolution	203 dpi	
Power supply	24V, 12V adapter (optional)	
Printing speed	up to 200 mm/s @24V	
Paper thickness	50 - 130 μ m	
Roll diameter	max. 100 mm (with CUSTOM roll holder)	
Paper width	44, 50, 54, 58, 60 mm	
Cutter	total and partial cut	
Interfaces	USB 2.0, Virtual Com, RS232 or ETH (optional)	
Sensors	Paper present, cover open, printhead temperature, cutter home, black mark, anti-jam, optional: near paper end	
Character set	PC437, PC850, PC858, PC860, PC862, PC863, PC864, PC865, PC866, Katakana, WPC1250, WPC1251, WPC1252, WPC1253, WPC1254, WPC1255, WPC1256, WPC1257, WPC1258, Chinese GB18030, Korean PC949	
Supported barcodes	UPC-A - UPC-E - EAN13 - EAN8 - CODE39 - ITF - CODABAR - CODE93 - CODE128 - CODE32 Codice QR - Aztec - PDF417 - Datamatrix - GS1 Databar	
Print head life	150 km / 100M pulses	
Cutter life	1M	
LED paper mouth	No	Default
Drivers	Windows® (32/64 bit), CUPS Linux (32/64 bit), OPOS, Java POS, Status Monitor SDK	
SW tools	PrinterSet, CPT, Windows® API, Driver Manager, Android™ API, iOS API	
Operative temperature	-20 to +70°C ; 10 to 80% RH (no condensation)	
Dimensions	59.5 mm (L) x 86 mm (W) x 86.5 mm (H)	71.5 mm (L) x 86 mm (W) x 89.5 mm (H)
Weight	330 g	340 g

MODELS



915NA010100300
PRINTER VKP60 USB RS232
COMPACT



915NA020100300
PRINTER VKP60 USB RS232
PAPER MOUTH

Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: 8RQN7AZ

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 03 December 2024