

1	2	3	4	5	6	7	8	9	10	
TOOL NO.						REV.	DESCRIPTION	ECN No.	NAME	DATE
D-SUB 01100E						0.0	NEW	/	廖宏玲	14.06.27
D-SUB 01003										
CORE 03100										
CORE 03025										


A

B

C

CIRCUIT DIAGRAM		
P1	WIRE COLOR	P2
1	RED(COAX,COND)	1
2	GREEN(COAX,COND)	2
3	BLUE(COAX,COND)	3
5	BLACK	5
6	RED(COAX,SHIELD)	6
7	GREEN(COAX,SHIELD)	7
8	BLUE(COAX,SHIELD)	8
9	BROWN	9
10	ORANGE	10
12	YELLOW	12
13	GREEN	13
14	BLUE	14
15	PURPLE	15
CASE	BRAID SHIELD	CASE

CIRCUIT DIAGRAM			
P1	WIRE COLOR	P3	
4	RED	RED	3
11	WHITE	WHITE	2
CASE	BRAID SHIELD	CASE	

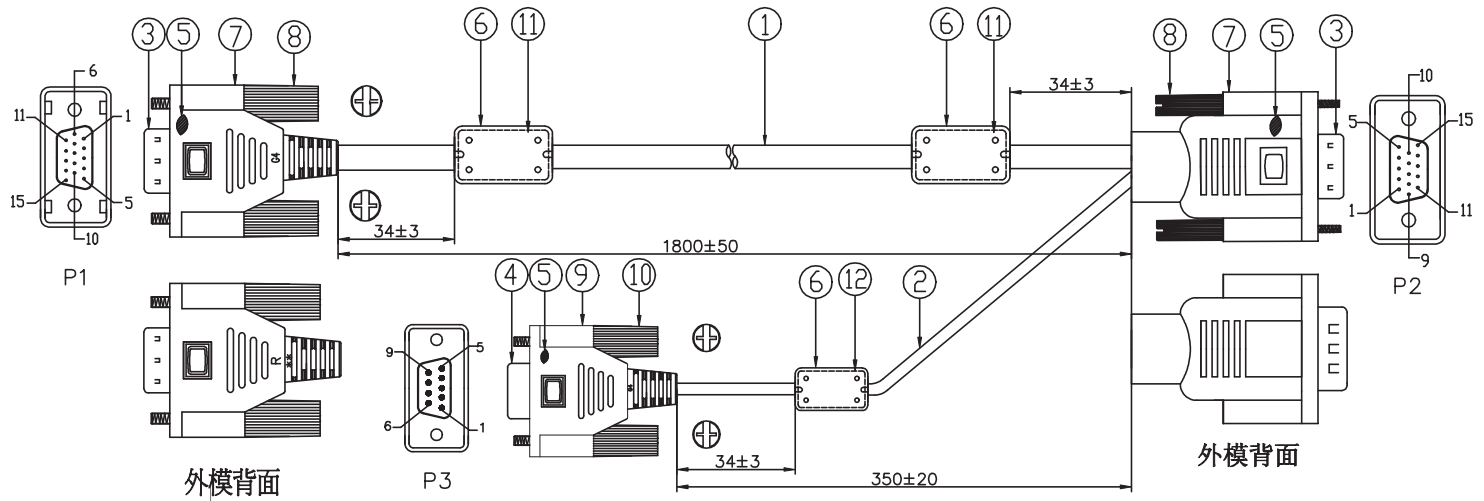

注：1. P2端主線的紅白電子線與OD3.0紅白電子線對接;
2. P2端第4PIN和11PIN不要焊接

D

ITEM	DESCRIPTION	Q'TY	UNIT
13	COVER	ATTACH DUST COVER	2 PCS
12	CORE	CORE $\phi 10.5 \times 20 \text{mm} \times \phi 5.5$	1 PCS
11	CORE	CORE $\phi 14.2 \times 28.5 \text{mm} \times \phi 7.2$	2 PCS
10	SCREW	THUMB SCREW 4-40UNC COLOR BLACK	2 PCS
9	MOLDING	OUTER MOLDING COLOR BLACK	N/A G
8	SCREW	THUMB SCREW 4-40UNC COLOR PANTONE 661C (藍色)	4 PCS
7	MOLDING	OUTER MOLDING COLOR PANTONE 661C (藍色)	N/A G
6	MOLDING	OUTER MOLDING COLOR BLACK	N/A G
5	CASE	INNER CASE	3 PCS
4	CONN	D-SUB CONNECTOR 2R-9P(F)SOLDER (黑膠)	1 PCS
3	CONN	D-SUB CONNECTOR 3R-15P(M)SOLDER (藍膠實芯PIN)	2 PCS
2	CABLE	UL2547 2C*30AWG+EA COLOR BLACK OD: 3.0	N/A mm
1	CABLE	UL20276 (3+9C)30#+AB編裸 (AL) COLOR BLACK OD:5.8	N/A mm

NOTE: 1. TEST VOLTAGE: 300V DC/1Sec
2. INSULATION RESISTANCE: 100M Ω (MIN)
3. CONDUCTION RESISTANCE: 2 Ω (MAX)

E

F

PROPRIETARY NOTE: THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD	
APPD: 凌成發 CHKD: 徐玲瓏 DR: 陳金文	鴻碩精密電工股份有限公司 HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD TITLE: HDB 15P (M) TO HDB 15P (M) CABLE L=1800mm CUST P/N: 鈦積 5313118107FH DWG NO: D0001180R87TV
UNITS: mm [INCH]	SHEET: 1 OF 2 REV: 0.0

ISE01-1407008-S(D)K03009R05

D

E

F