

# DT-170P-M1

## 17" PCAP Medical-Grade Touch Monitor



### Description


The DT-170P-M1 is a 17" standard format medical-grade monitor perfect for a wide range of healthcare applications including, nurses' stations, equipment/devices, laboratory instruments, medical carts, and advertising. This unique, 10-point touch monitor is specifically designed to enhance your medical space and end-user experience while maintaining a durable, compliant, and versatile product enabled by IP54 rated screens and IEC-60601-1-2 4<sup>th</sup> edition EMC compliance. Naturally intuitive, engineered performance, and designed for medical, this monitor combines a commonality of medical market requirements and consumer-grade touch experience into one solution.



### Featured Specifications

- Size: 17" TFT LCD
- Maximum Resolution: 1280 x 1024
- Contrast Ratio: 1000:1
- Aspect Ratio: 5:4
- Brightness: 350 nits (No Touch), 297 nits (P-CAP)
- View Angle: H: 170°, V: 160°
- Video Port: 1 x VGA, 1 x HDMI, 1 x DP
- Warranty: 3 year

DisplayPort    HDMI    VGA    Ethernet    USB 2.0 Type B

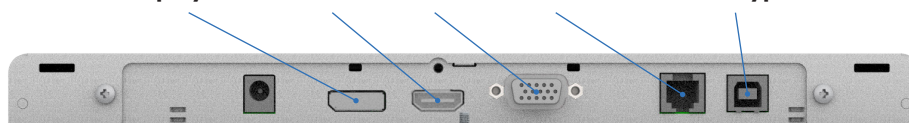

# Specifications

## Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
Screen Treatment	Anti-Glare

## I/O Ports

Serial Port	1 x RJ11 (for remote key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI, 1 x DP
Audio Port	–
Power Input	1 x 2.1 mm 12V DC Jack

## Color Calibration

Color Temperature	5500K / 6500K / 7500K / 9300K / User Definition
Gamma Selection	Native / Gamma 1.8 / Gamma 2.2 / Dicom
Gamma LUT (bits)	10
Scaling Mode	Full / 5:4 / 4:3 / 16:9 / 1:1

## Physical Properties

Power Supply	Medical External Power Adaptor 60W
Speaker	–
Housing Color	White
Construction	Glass, SECC Metal, Plastic (ABS)
Compliance	Front Panel IP65
Dimensions (W x H x D) mm	369.0 x 334.9 x 202.0
Net Weight (kg)	5.3
Gross Weight (kg)	7.3
Carton (W x H x D) mm	450.0 x 418.0 x 277.0
VESA	100 x 100 mm
Ball Drop	IK07

## Safety

Certifications	CE, CB, FCC, UL, CCC, RoHS, IEC-60601-1-2 4 <sup>th</sup> edition EMC compliant
----------------	---

## Environment

Operating Temperature	0° C ~ 40° C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20° C ~ 60° C, 20% ~ 90% RH. Non-Condensing

## Optional Peripheral

N/A

