

# IC-215P-AW4

## 21.5" PCAP Touch Computer



Stand sold separately  
**Part #SS-215-A1**


### Description

The IC-215P-AW4 is equipped with a Celeron® J3965U processor, standard with 8GB DDR4 memory and 128GB storage. Combining computing performance, and enterprise control with our industry leading touch experience enables an effortless and reliable solution for a variety of applications. Designed with an ultra-modern, slim aesthetic, versatile I/O selections and edgeless touch brings to life a true value-add experience for customers. It offers flexibility from POS to an exposed kiosk, self-service to point-of-information, and landscape to portrait. The IC-215P-AW4 offers peripherals, MSR and Camera Module Kit, to support a wide range of applications, making it a perfect form, fit and function solution. Stand is sold separately (part #SS-215-A1).

### Featured Specifications

- Size: 21.5" TFT LCD
- Processor: Celeron® 3965U (2.20 GHz, 2M Cache)
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 1000:1
- Aspect Ratio: 16:9
- Brightness: 250 nits (No Touch), 225 nits (P-CAP)
- View Angle: H: 178°, V: 178°
- Video Port: 1 x Mini DP
- Warranty: 3 year

USB 3.1 Type C   Mini DP   2x USB 2.0 Type A   2x USB 3.0 Type A   RJ45   RS-232 Serial Port   DC In

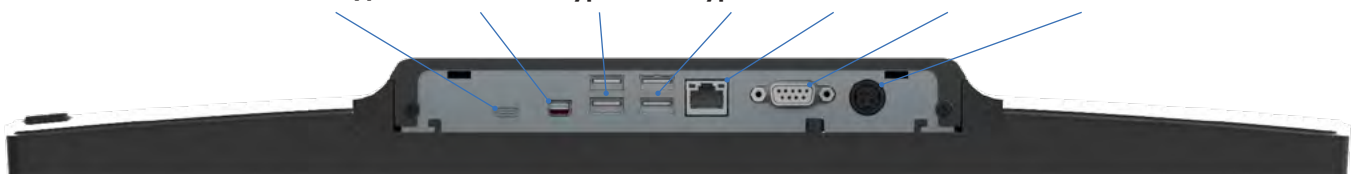

# Specifications

## System Configuration

Processor	Celeron® 3965U (2.20 GHz, 2M Cache)
GPU	Intel® HD Graphic 620
System Memory	4GB So-DIMM DDR4, 2133 MHz, up to 32GB
Storage Device	128GB SSD
Wi-Fi & Bluetooth	802.11 a/b/g/n/ac, Bluetooth 4.2 (Support BLE)

## Touch LCD Display

Touch Screen	Projected Capacitive Touch, 10 points
Brightness	250 nits (No Touch), 225 nits (P-CAP)
Contrast Ratio	1000:1
Aspect Ratio	16:9
View Angle	H:178°, V:178°
Display Surface	7H Hardness Durable Glass

## I/O Ports

Serial Port	1 x RS-232 (DB9, NA/5V/12V, BIOS Selectable)
USB Port	2 x USB 2.0 Type A
	2 x USB 3.0 Type A
	1 x USB 3.1 Type C (Support Display ALT Mode and PD2.0, support 5V/3A , 12V/2.5A output, maximum 30W)
LAN Port	1 x RJ45 Giga LAN
Video Port	1 x Mini DP
Power Input	1 x DC in 24V/5A 4 pin, via 24V/120W External Power Adapter

## Operating System Support

OS	Windows® 10
----	-------------

## Physical Properties

Speaker	2 x 2W
Material	Plastic, Glass, SECC Metal
Housing Color	Dark Gray
Dimensions (W x H x D) mm	510.96 mm x 322.28 x 172.98 mm
Net Weight (kg)	6.77 kg
Gross Weight (kg)	9.79 kg
Carton (W x H x D) mm	615 mm x 450 mm x 330 mm
VESA	100 mm x 100 mm

# Specifications

---

## Safety

Certifications	CE, FCC, LVD, UL, RoHS
----------------	------------------------

---

## Environment

Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
-----------------------	--

---

Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
---------------------	--

---

## Optional Peripheral

MSR	MSR-215-A1 (Sold Separately)
-----	------------------------------

---

Camera	CAM-000-A1 (Sold Separately)
--------	------------------------------

---

Stand	SS-215-A1 (Sold Separately)
-------	-----------------------------

---

